

**Double acting - double orifice
Threaded BSP 2"**

Use:

Potable or untreated water (not sewage)
to max. 90°C
Working pressure: min. 0.2 bar
max. 16 bar

Tests:

Hydraulic test: 1.5 x PN

Options:

Brass base to BS 2874
NPT thread

Also available in GG-25

Orifice sizes:

Automatic: 12 mm²
Kinetic: 804 mm²

Materials:


Body, base, clamping key, seal support	Reinforced nylon
Screw	Stainless steel AISI 303
Rolling seal	EPDM rubber
Float	Foamed polypropylene
O-ring	BUNA - N
Drainage elbow	Polypropylene



Double acting - double orifice
Threaded BSP 2"


Component list:

- 1. Body
- 2. Screw
- 3. Rolling seal
- 4. Seal support
- 5. Drainage elbow (1 1/2" BSP-female)
- 6. Clamping key
- 7. Float
- 8. O-ring
- 9. Base

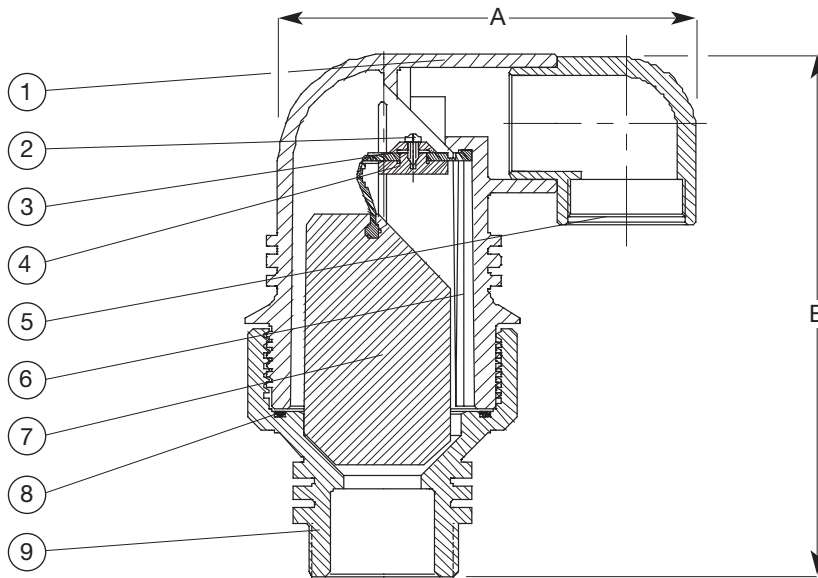


Air discharge


Automatic air valve
Outflow

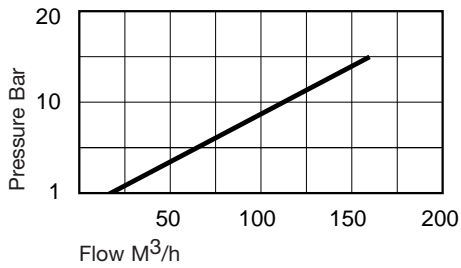

Kinetic air valve
Outflow

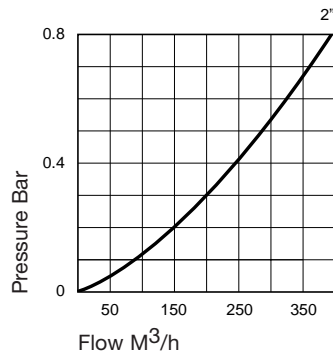

Inflow

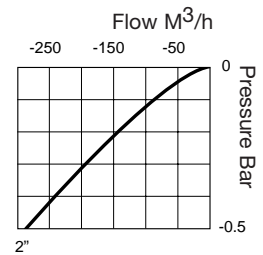

Ref. nos.	DN	BSP	A mm	B mm	Weight kilos
701-050-4099	50	2"	180	209	1.10 (Nylon base)
701-050-4199	50	2"	180	209	2.20 (Brass base)